




Point-of-Use (PoU) PCAir - 50Hz  
Air Cooled, Direct Expansion

# Top Performing Heating and Cooling Built to Last.



## IMPROVE YOUR AIR.

- ▶ Built with the quality to last decades
- ▶ Cooling and heating performance exceeding aircraft requirements
- ▶ Customer-focused features and options, like special air filtration and minimized defrost cycles

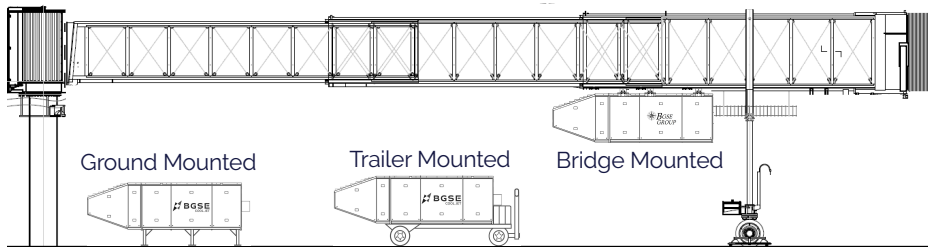

## Components by Model

		BGAC030	BGAC045	BGAC060	BGAC090	BGAC120
1 Blower		20-HP	30-HP	50-HP	60-HP	80-HP
2 TEFC Blower Motor						
3 Blower Motor VFD						
4 Electrical Box		✓	✓	✓	✓	✓
5 Main Air Outlet		✓	✓	✓	✓	✓
6 Optional PBB Cool Outlet		✓	✓	✓	✓	✓
7 Optional 2nd Air Outlet				✓	✓	✓
8 Stage 1 Cooling Coil		15-ton	15-ton	30-ton	30-ton	60-ton
9 Stage 1 Compressor						
10 Condensor Fan						
11 Stage 2 Cooling Coil		15-ton	15-ton	15-to	30-ton	30-ton
12 Stage 2 Compressor						
13 Condensor Fan						
14 Stage 3 Cooling Coil			15-ton	15-ton	30-ton	30-ton
15 Stage 3 Compressor						

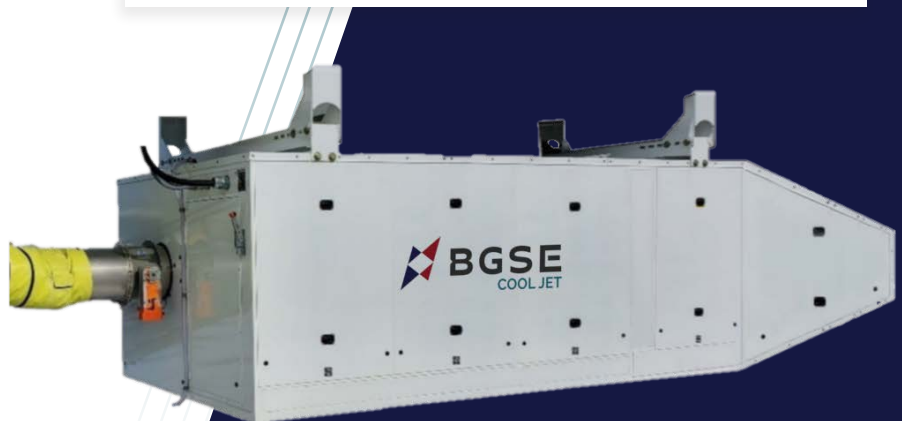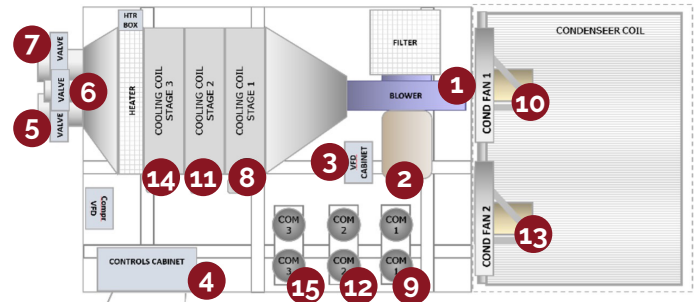



## Point-of-Use (PoU) PCAir Air Cooled, Direct Expansion

<b>Design Ambient:</b>	95°F (35.0°C) dry bulb 78.0°F (25.6°C) wet bulb		<b>Ambient Limits:</b>	-40°F (-40°C) to +125°F (+51.7°C) 0%-100% RH	
<b>Model Number/Weight</b>	BGAC030A / 30-ton	BGAC045A / 45-ton	BGAC060A / 60-ton	BGAC090A / 90-ton	BGAC120A / 120-ton
<b>Electrical (V / <math>\phi</math> / Hz)</b>	380 V / 3 Ph / 50 Hz				
Cooling FLA / MCA	110 A / 119A	170 A / 180 A	225 A / 237 A	324 A / 344 A	421 A / 448 A
Cooling ROP / MOP	150 A / 150 A	200A / 225 A	250 A / 300 A	400 A / 450 A	500 A / 600 A
Standard Heater	36 kW	54 kW	54 kW	60 kW	90 kW
Large Heater - MCA ROP / MOP per NEC 440.33	54 kW – 133 A 150 A / 150 A	90 kW – 223 A 250 A / 300 A	90 kW – 239 A 250 A / 300 A	120 kW – 332 A 400 A / 400 A	144 kW – 411 A 500 A / 600 A
	ROP - Recommended Overcurrent Protection device based on soft-start blower. MOP - largest overcurrent protection device allowed.				
<b>Blower</b>	20 BHP, Centrifugal	30 BHP, Centrifugal	40 BHP, Centrifugal	60 BHP, Centrifugal	80 BHP, Centrifugal
Mass Airflow (Variable)	180 ppm @ 24 "WG	284 ppm @ 28 "WG	340 ppm @ 30 "WG	480 ppm @ 36 "WG	588 ppm @ 42 "WG
Mass Airflow (Variable) Volumetric Airflow	1.36 kg/s @ 6.1 kPa 2.430 CFM (4126 m³/h)	2.15 kg/s @ 7.1 kPa 3.830 CFM (6510 m³/h)	2.57 kg/s @ 7.6 kPa 4.590 CFM (7790 m³/h)	3.63 kg/s @ 9.2 kPa 6.480 CFM (11,000 m³/h)	4.45 kg/s @ 10.7 kPa 7.940 CFM (13,480 m³/h)
Discharge Air Temp	24 to 40°F (-7.2 to 4.4 °C)				
Sound Level	85 dBA @ 15 ft.				
<b>Evaporator Coils</b>	4-row				
Tube / Fin Material	Cu / Al (enhanced)				
Defrost Interval	20-90 Min.				
<b>Compressors</b>	2 x 15 Tons, Scroll	3 x 15 Tons, Scroll	4 x 15 Tons, Scroll	2 x 15, 2 x 30, Scroll	4 x 30 Tons, Scroll
Refrigerant	410A				
<b>Condenser Coils</b>	4-row				
Tube / Fin Material	Cu / Al (enhanced)				
<b>Condenser Fans</b>	2 x 5 BHP	2 x 5 BHP	2 x 7.5 BHP	2 x 10 BHP	4 x 15 BHP
Diameter	36 in (905 mm)	36 in (905 mm)	36 in (905 mm)	36 in (905 mm)	36 in (905 mm)
Meets Airbus Compliance Document for Suppliers X21RP1146224_v7, Boeing Aircraft Maintenance Manuals (AMM) and Facility Planning Guides IATA AHM 974 and IATA AHM 997, AHRI-410. Labeling Process by ETL to UL-1995. Specifications subject to change without notice.					


### Optional Features

- ▶ Single or Dual Hose Outlets + Bridge Cool
- ▶ Apron Management System Interface (Ethernet or Modbus)
- ▶ Boarding Bridge Cooling / Heating and Controls
- ▶ Delivery Hose (style / length) and Connectors
- ▶ Hose Storage and Retrieval Systems
- ▶ Coil Phenolic Coating
- ▶ Condenser Fan Motor VFDs
- ▶ Standard and High-Capacity Heating Coils
- ▶ Aircraft Cabin or Bridge Temperature Probes




## Point-of-Use (PoU) PCAir Air Cooled, Direct Expansion


Weights	
30-ton <sup>1</sup>	3,735 lbs. (1,694 kg)
45-ton <sup>1</sup>	4,925 lbs. (2,234 kg)
60-ton <sup>1,2</sup>	5,285 lbs. (2,561 kg)
90-ton <sup>1,3</sup>	8,680 lbs. (3,937 kg)
120-ton <sup>1,3</sup>	11,074 lbs. (5,023 kg)

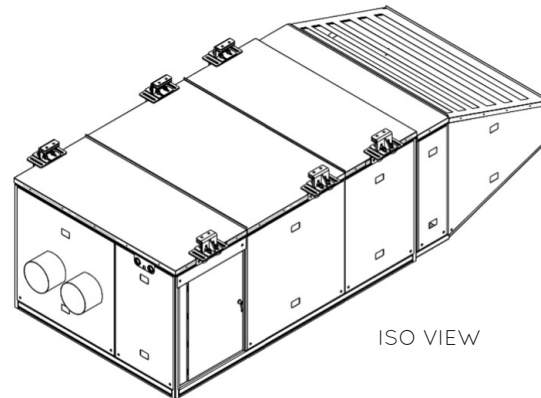

ISO VIEW


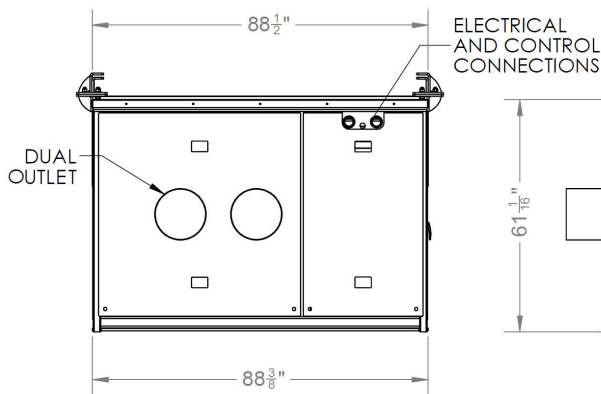


FRONT VIEW  
DISCHARGE END

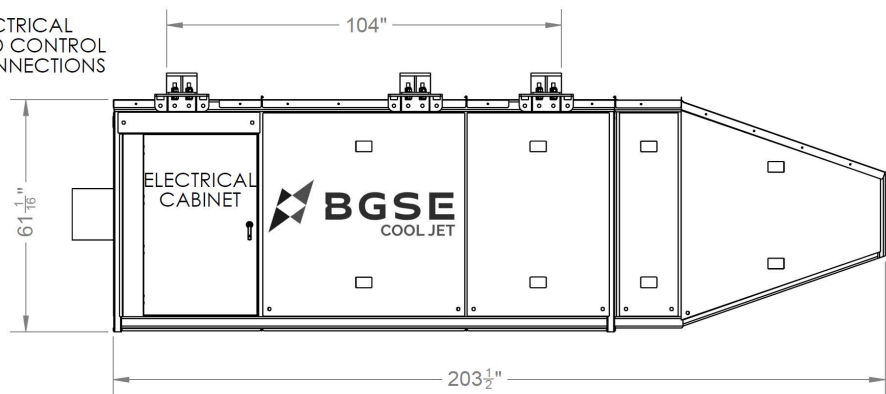

LEFT SIDE VIEW

**90-ton, 120-ton**

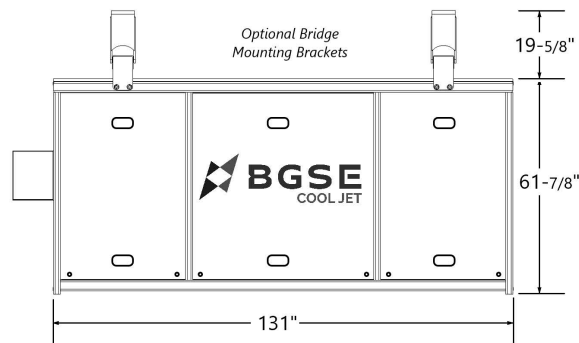

**30-ton, 45-ton, 60-ton**

BGSE is an international supplier of the highest quality aerospace support products. We're committed to 100% on time supply, zero defects, and complete customer satisfaction.

Our core focus is turn-key, integrated solutions. BGSE has the experience to execute design-build projects with architects, engineering firms, general contractors, electrical contractors, mechanical contractors and all installation and maintenance companies.



(704) 992-9522 ► 1403 Claredon Point Court, Huntersville, NC 28078