

Cargo stopper device: The cargo stopper device is designed to restrain cargo identified as « piercing » and to ensure restraint/tie-down of a piece of cargo that does not lend itself to either direct hooking of restraint straps or passing a strap around without risk of slippage (see 1,2,2, 1,2,3 and 1,2,4 of AS6554A). Designed acc. to AS6554A and ETSO C202


Certifications: ETSO-C202 EASA.210.10071052

Technical specifications


- ☐ Rated Ultimate load : 2225 daN / 5000 Lbf
- ☐ Textile material: High Tenacity Polyester
- ☐ Fittings : Snap hook with keeper, delta ring, pear ring or combination of each.
- ☐ No Tensioning devices
- ☐ Marking :
 - 1 datalabel
 - 1 PVC tarpaulin (customer logo in option)

Shape and number of fittings	End fitting	Cargo stopper P/N (series)
Star 5	Snap Hook	SC05 S05 XX 16 07 XXXX
	Delta Ring	SC05 S05 XX 16 0A XXXX
	Pear ring	SC05 S05 XX 16 09 XXXX
Star 6	Snap Hook	SC05 S06 XX 15 07 XXXX
	Delta Ring	SC05 S06 XX 15 0A XXXX
	Pear ring	SC05 S06 XX 15 09 XXXX
Circular 8	Snap Hook	SC05 C08 XX 58 07 XXXX
	Delta Ring	SC05 C08 XX 58 0A XXXX
	Pear ring	SC05 C08 XX 58 09 XXXX


Star 5

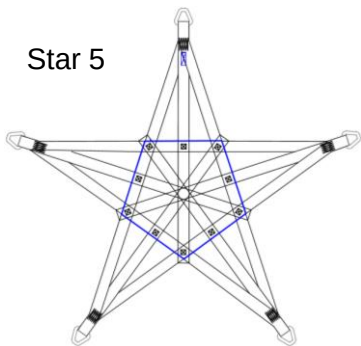

Star 6

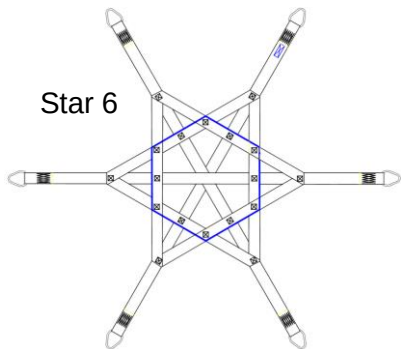

Circular 8

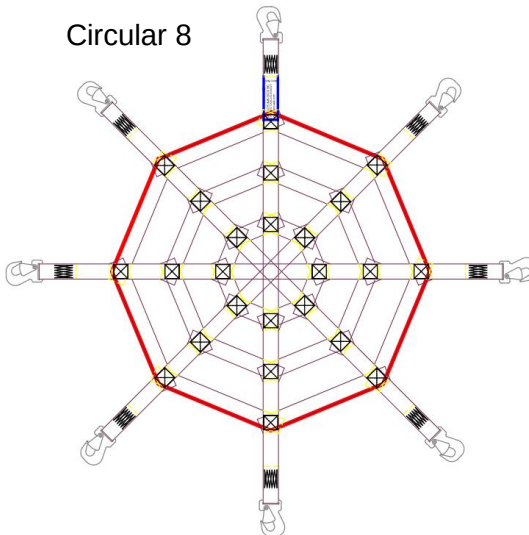

Snap Hook



Delta Ring



Pear ring