
2000-215 Self Propelled Passenger Stair



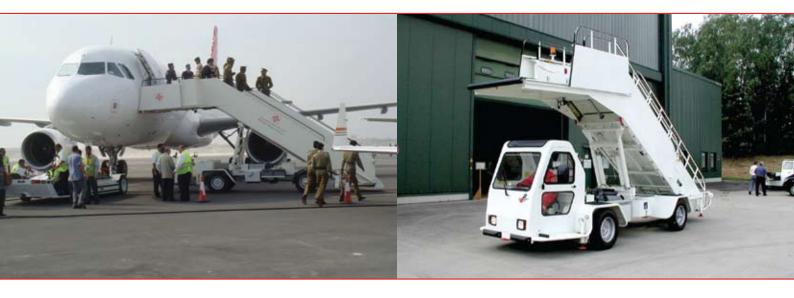

Self Propelled Passenger Aircraft Stair

With a proven reputation as the ideal compact 'all-aircraft' stair and a height range of 2.2m – 5.8m, the 215 Series is suitable for all aircraft from MD80 up to B747 and A340.

- Exceptionally reliable with low long term cost of ownership.
- Extra wide stair and top platform options.
- Compact vehicle with superb manoeuvrability guaranteeing simplicity in positioning to aircraft threshold.
- Efficient, stable, safe and effective.
- Ideal smooth action telescopic stair section promotes passenger confidence and security.
- Advanced heavy duty energy absorbing chassis with driver's safety cab blending agility and in depth strength for long term durability.
- Available with a range of diesel engine options conforming to latest European emission standards.
- Electric environmentally friendly battery power option.
- Available with either open or a weatherproof driver's cab with heater and electrically heated front and rear windscreens guaranteeing clear visibility in wet/humid conditions.

- Ergonomically designed driver controls and information system.
- Corrosion resistant features including stainless steel stair elevation running gear.
- Shot blasted and finish painted to customers individual livery requirements with full wax treatment.
- Overhead or totally enclosed Plexi glass canopy options available.
- Can also be supplied fitted to standard commercial vehicle chassis.
- The perfect vehicle which will reliably perform worldwide irrespective of temperature or conditions.
- Complies with Motor Vehicle Construction and Use, Health and Safety, IATA and CEN Standards.



Passenger Stairs

Belt Loaders
Cargo & Freight Vehicles
Toilet & Water Trucks
Aircraft Loaders
Fuel Tank Repair Trolleys
Heater Trolley
Air Conditioning Trolley
Maintenance Docks & Stagings
Special Projects

Remember, each piece of equipment is maintained via our through-life support and training services — wherever you are in the world, 365 days of the year.

+44 (0)1656 743700 office@amss.co

www.amss.co

2000-215 Self Propelled Passenger Stair



Stair dimensions

- Nominal tread depth 276mm (11")
- Nominal tread width 1,500mm (59") (lower section)
- Nominal tread width 1,720mm (68") (upper section)
- Top Platform width 3,000mm (118")
- Intermediate landing 872mm (34") depth
- Constant riser 196mm (8")

Height range

- Low Position 2,200mm (87")
- High Position 5,800mm (228")

Shipping dimensions

Length 7,900mm (311")Width 3,385mm (133")Height 3,655mm (144")

Shipping weight

• Approx 6,200kg (13,668lb)

Standard features

- Push button automatic transmission with automatic creep speed interlock and 'on-the-move' reverse gear inhibit
- Automatic stair locking pawls
- Low voltage LED stair lighting
- Spring loaded self aligning top platform nose section
- Lockable sliding wing panels

Optional equipment

- Fully enclosed weatherproof cab
- Extra wide stair section and top platform
- Aircraft movement warning system
- Powered extending top platform
- Fully enclosed canopy with 'air-bridge' style weatherproof bellows

